


Product Datasheet — Flanged Levels With Cover (Range Overview)

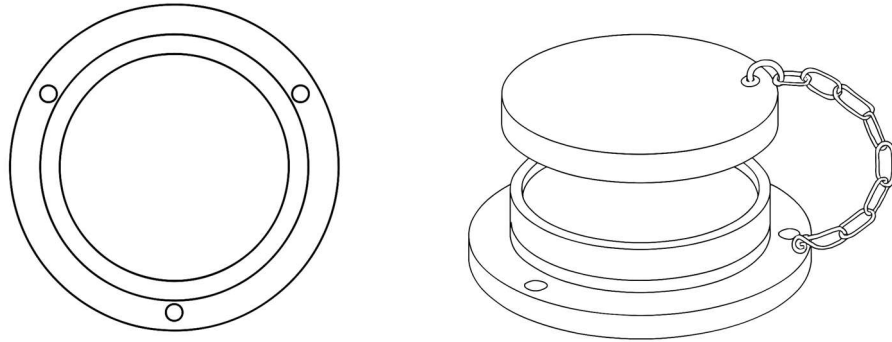

Range overview

Aspect	Options / Range	Notes
Sensitivity	7' / 2 mm $\approx 0.1167^\circ$ ≈ 2.04 mm/m (2/1000)	Arcminutes per 2 mm bubble travel, 2.04 mm/m or $\approx 0.1167^\circ$ angular displacement
Material	Aluminum	aluminum
Graduations	0.2°, 0.4°, 0.6°, 0.8°, 1.0°	$\pm 1^\circ$ range marking engraved
Mounting	Flanged circular body with 3 mounting holes	Holes for secure mounting
Cap	Metal cap with chain	Aluminum, with chain for cap retention.

Sensitivity comparison

Arcminutes (') per 2 mm	Equivalent (mm/m)	Typical use
7'	2.04	Precision set-up
10'	2.91	Fine alignment
15'	4.36	General leveling